



Number of poles
Operating voltage type

Nr. 3
AC

Contact characteristics

IEC Conventional free air thermal current I_{th}

A 100

Rated short time current (1s) I_{cw} (rms)

kA 2.5

Mechanical features

Tightening torque for terminals


min	Nm	5
max	Nm	6
min	lbin	45
max	lbin	54

UL technical data


UL Standard

UL98

Dimensions [mm (in)]

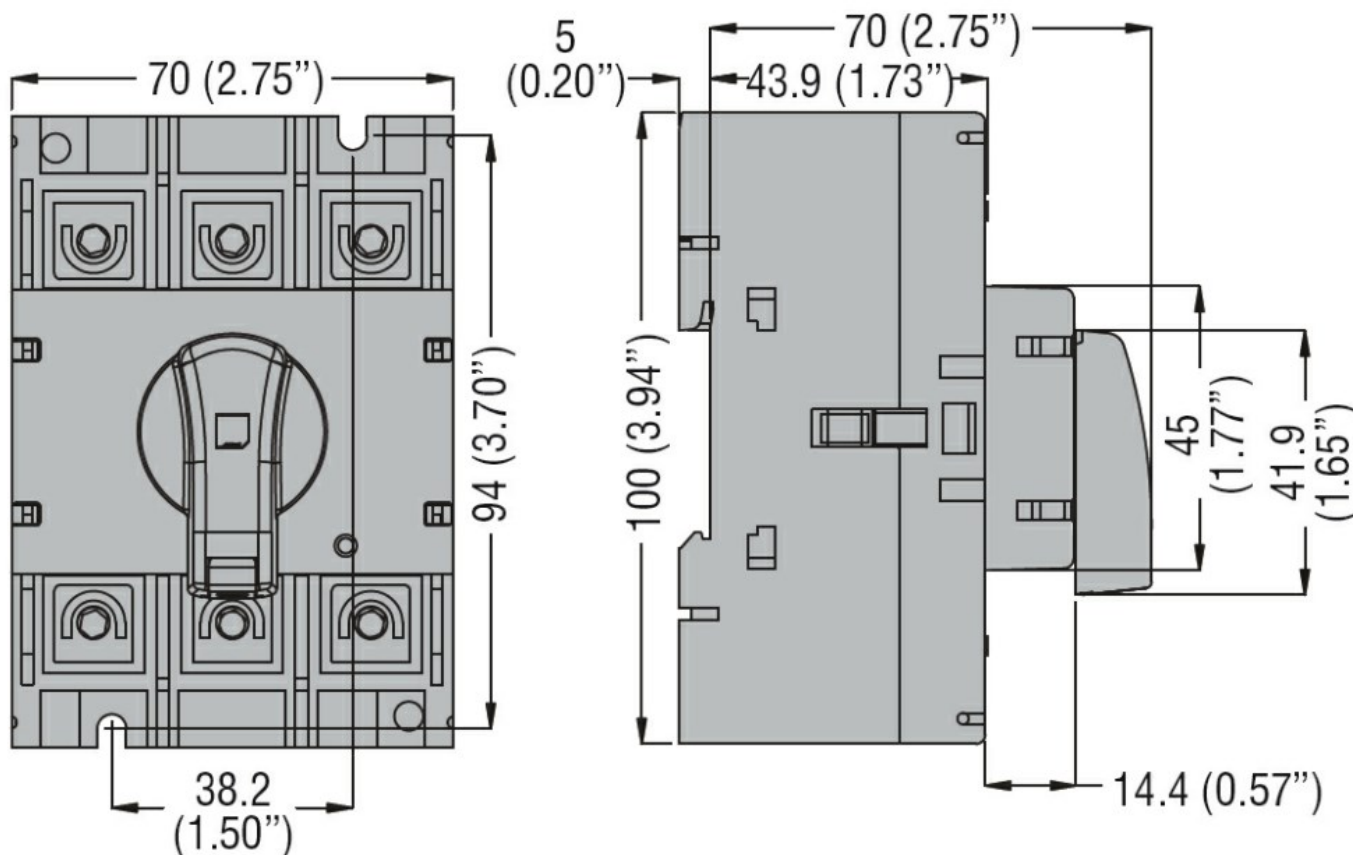

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n°4

IEC/EN 60947-1

IEC/EN 60947-3

UL98

Certifications

CCC

CSA C22.2 n°4

cULus according to UL98

EAC

ETIM classification

ETIM 8.0

EC000216 -
Switch
disconnecter